

NPDL-C1011031


Single input, single output

Input: 0 ~ 60 V AC
Output: 4 ~ 20 mA


This AC voltage transmitter converts the 0 ~ 60 V AC signals to current signals. It can work without an independent power supply. The input, output are galvanically isolated from each other.

Parameters

Power supply:	12 V DC ~ 30 V DC (Reverse power protection)
Input signal:	0 ~ 60 V AC
Frequency range:	40 Hz ~ 1 kHz
Overload capacity:	double input nominal value
Output signal:	4 ~ 20 mA
Load resistance:	$R_L < [(U-12)/0.022]\Omega$; U: Loop power supply
Accuracy:	0.2% F.S. (0 ~ 110%)
Temperature drift:	50ppm/°C
Response time:	≤ 500 ms
Electromagnetic compatibility:	IEC 61326-3-1
Dielectric strength:	≥ 1500 V AC (Input/Output)
Insulation resistance:	≥ 100 MΩ (Input/Output)
Operation temperature:	-20 °C ~ +60 °C
Storage temperature:	-40 °C ~ +80 °C
Dimension:	17.8 mm (W) × 110 mm (H) × 117 mm (D)

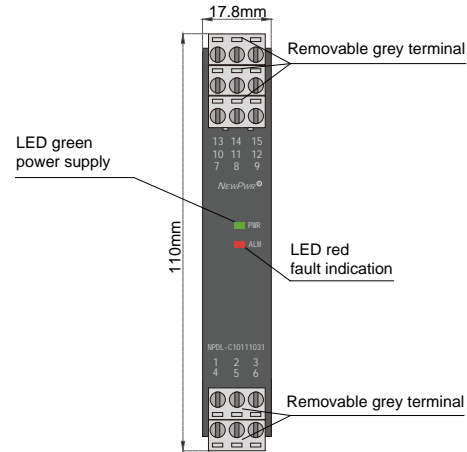

Wiring diagram

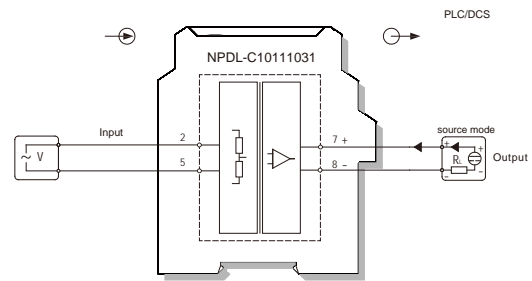

Model rules

NPDL-C101 1031

The input signal^{note1}

note1 : input signal

Number	Input signal
1	0 ~ 60 V AC
2	0 ~ 110 V AC
3	0 ~ 220 V AC
4	0 ~ 380 V AC
5	0 ~ 600 V AC
6	0 ~ 1000 V AC
7	User customized signal type

