



Technical data

Power supply:	11.5V DC~28 V DC (Reverse power protection)
Input signal:	K, E, S, B, J, T, R, N, etc Pt100, Cu100, Cu50, BA1, BA2, etc millivolt signal (-10mV~120mV) resistance signal (0~400Ω)
Line resistance:	≤ 20 Ω per line (RTD)
Output signal:	4~20mA
Load resistance:	$RL \leq [(U-11.5)/0.02]\Omega$; U is loop powered voltage

Range and Conversion accuracy list (25°C±2°C, not contain cold junction compensation) :

Type	Range	Min.span/Accuracy	
K	-200°C~+1372°C	<300°C, ±0.3°C	≥300°C, ±0.1% F.S.
E	-100°C~+1000°C	<300°C, ±0.3°C	≥300°C, ±0.1% F.S.
J	-100°C~+1200°C	<300°C, ±0.3°C	≥300°C, ±0.1% F.S.
N	-200°C~+1300°C	<300°C, ±0.3°C	≥300°C, ±0.1% F.S.
S	-50°C~+1768°C	<500°C, ±0.5°C	≥500°C, ±0.1% F.S.
R	-50°C~+1768°C	<500°C, ±0.5°C	≥500°C, ±0.1% F.S.
T	-20°C~+400°C	<300°C, ±0.3°C	≥300°C, ±0.1% F.S.
B	+400°C~+1820°C	<500°C, ±0.5°C	≥500°C, ±0.1% F.S.
Pt100	-200°C~+850°C	<100°C, ±0.1°C	≥100°C, ±0.1% F.S.
Cu50	-50°C~+150°C	<100°C, ±0.1°C	≥100°C, ±0.1% F.S.
Cu100	-50°C~+150°C	<100°C, ±0.1°C	≥100°C, ±0.1% F.S.
mv	-10mV~120mV	<10mV, 0.01mV	>10mV, ±0.1% F.S.
Ohm	0~400Ω	<50Ω, 0.05Ω	>50Ω, ±0.1% F.S.

Compensation accuracy 1°C (Temperature compensation range:
-40°C ~ +85°C)

Temperature drift: 25ppm/°C

Response time: ≤ 1s

Electromagnetic IEC 61326-1

compatibility:

Dielectric strength: ≥ 1500V AC (Input/Output)

Insulation resistance: ≥ 100MΩ (Input/Output)

Operation temperature: -40°C ~ +85°C (LCD: -30°C ~ +85°C)

Storage temperature: -40°C ~ +85°C

Dimension: Ø 59×31mm

Wire size: 1.5mm²

Screw terminal torque: 0.5Nm






Temperature transmitter

NTM 811


- RTD, TC, Ohm or mV input
- HART protocol, FDT and DTM support
- High accuracy
- Excellent EMC performance
- 1500V AC dielectric strength
- DIN A Head mount and field mount transmitters
- Compliant to IEC 61508



Wiring diagram



LCD display

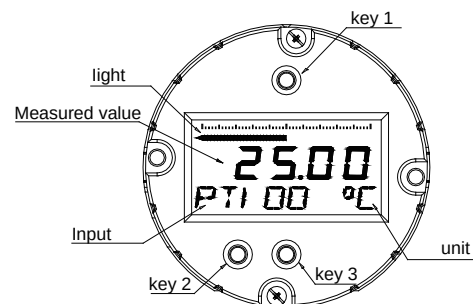

Explosive-proof parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Explosive-proof grade: Ex ia IIC T4/T6 Ga

T4: -40°C ~ +60°C T6: -40°C ~ +50°C

Certified parameters (Terminals 1, 2, 3, 4):

$U_o=5.4V$ $I_o=25mA$ $P_o=34mW$ $C_o=50\mu F$ $L_o=40mH$

Certified parameters (Terminals 7, 8):

$U_i=28V$ $I_i=93mA$ $P_i=670mW$ $C_i=0\mu F$ $L_i=0mH$