

NPFSR-K51D.C


Input: DO signal
Output: 1 NC

NPFSR-K52D.C is 1NC output safety relay, receiving DO signal, realizing reliable isolation control, and the field side supports up to 250VA load circuit. It can be used for safety related applications of SIL3 and SC3 in accordance with IEC 61508 standard, and ESD in SIS.

- Support dual channel operation
- System loop detection support
- Fail-safe technique
- Triple redundancy

Parameters


Power supply type	Loop supply
Voltage range	18 V ~ 32 V DC, Typical 24V DC
Power dissipation	≤ 1.4W/24 V DC/Channel
Current consumption	≤ 45mA/24 V DC/Channel
Test pulse width	≤ 4ms
Cable resistance	≤ 15Ω
Input devices	Safety switch, DO signal
Number of contacts	1 NC
Contact material	AgSnO ₂ +Au plating
Contact loading	5A/250V AC, 5A/24V DC
Proof test	Refer to safety manual
Energized	≤ 50ms
De-energized delay	≤ 50ms
Switching frequency	≤ 10Hz
EMC	According to IEC 61298-3, IEC/EN 61000-6-2, IEC 61326-3-1
Rated insulation voltage	250V AC
Rated impulse voltage	6000V(1.2/50us)
Dielectric strength	1500V AC, 1 min
Clearance and creepage	According to IEC 60664-1
Vibration	10Hz ~ 150Hz, 0.75mm
Overvoltage category	III
Pollution degree	2
Protection type	IP20
Ambient temperature	-20°C ~ +60°C
Storage temperature	-40°C ~ +80°C
Operating altitude	≤2000m
Mechanical life	10×10 ⁶ cycles

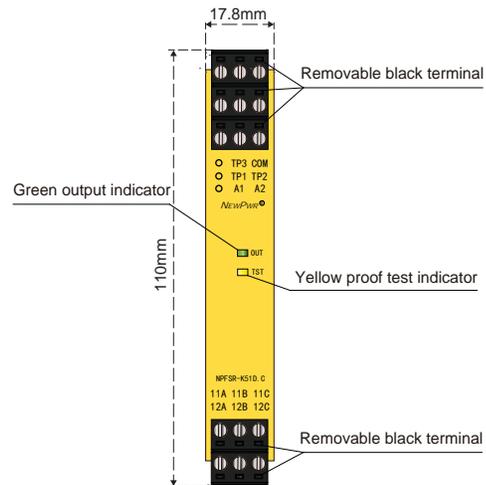

SIL3
IEC 61508



Functional Block Diagram

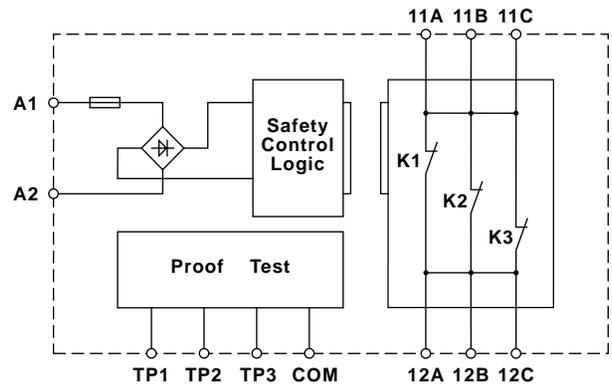

Safety Values

Proof-test interval	15 years, according to IEC 61508
DC _{avg}	60%, according to IEC 61508
SIL	SIL3, according to IEC 61508
HFT	0, according to IEC 61508
SFF	≥ 90%, according to IEC 61508
PFD _{avg} /PTI = 15 years	8.46×10 ⁻⁵ , according to IEC 61508
PFH	1.205×10 ⁻⁸ 1/h, according to IEC 61508